
SUPER SPOT COOLIN STAR 1800BTU HIGH COOLIN PORTABLE AIR CONDITIONER



When used in high humidity areas, continuous operation may be interrupted due to excessive dehumidification thus producing excessive water, where the machine will stop operation of its compressor in normal circumstance i.e. the Al C is dehumidifying more water than it can self evaporate. The unique design allows you to connect a water drain pipe to upper water dumping port for extra convenience and ease of use. This will allow the machine to drain the water automatically. When this feature is desired to be used connect the 3 metre water pipe to the automatic water releasing port then drain water out a window or suitable drainage area or exit point. Please ensure the water drain hose is no higher than 1.5 meters from base of unit. IF THIS FEATURE IS NOT REQUIRED (due to lower humidity) please ensure plastic screw lid is tightly secured to upper drainage port.







Hotpoint OOLI



















Model no.	KY-36E(MAC181)
Cooling Capacity	17500Btu/h
Heating Capacity	
Electrical Data	
Voltage/Frequency/Phase	220~240V/50Hz
Power Input-cooling	1600W
Power Input-heating	/
Rated current-cooling	7.7A
Rated current-heating	/
Performance	
Refrigerant/Charge	R407C
EER	2.4
Dehumidify Capacity	3.2
Air Flow	302CFM
Noise Level-H/L	<45dB
Compressor brand	TOSHIBA
Compressor Model No.	PG225

PRODUCT FOR MORE COMFORTABLE WORLD

Due our policy og constant development, Aoli reserves the right to modify technical data without notice. while errors and omission are apossibili<mark>ty, every reasonable effort has b</mark>een made to ensure the informationin this catalogue correct...



RoyalCool Holpoint OOLI



PRODUCTS SHINING

- 4—in-1
- High Efficiency with Energy class A
- Using Heat pump technology, products over twice as much heat while consuming less energy than an electric heater
- Humanized Sleep function
- Three speed fan with Two way oscillation
- Adjustable thermostat from 16°C to 31°C
- O Programmable 24 hours auto on/off timer
- Auto mode chooses the comfort settings for you
- High Evaporative Dehumidifier
- LCD Display
- low voltage startup Memory function
- Loss of power protection







































	10000RTU
	10000BTU
Model no.	KY-26B/C(MAC100
Cooling Capacity	10000Btu/h
Heating Capacity	/
Electrical Data	
Voltage/Frequency/Phase	220~240V/50Hz
Power Input-cooling	1000W
Power Input-heating	/
Rated current-cooling	4.6A
Rated current-heating	/
Performance	
Refrigerant/Charge	R407C
EER	2.4
Dehumidify Capacity	2
Air Flow	302CFM
Noise Level-H/L	<50dB
Compressor brand	TOSHIBA
Compressor Model No.	PG130X1C-4DZDE

	12000BTU
Model no.	KY-32B/C(MAC120)
Cooling Capacity	12000Btu/h
Heating Capacity	
Electrical Data	
Voltage/Frequency/Phase	220~240V/50Hz
Power Input-cooling	1140W
Power Input-heating	/
Rated current-cooling	5.2A
Rated current-heating	1
Performance	
Refrigerant/Charge	R407C
EER	2.4
Dehumidify Capacity	2.4
Air Flow	336CFM
Noise Level-H/L	<49dB
Compressor brand	TOSHIBA
Compressor Model No.	PG150X1C-4DZDE2

PRODUCTS FOR A MORE COMFORTABLE WORLD

Due to our policy of constant development, Aoli reserves the right to modify technical data without notice. While errors and omissions are a possibility, every reasonable effort has been made to ensure the informationin this catalogue is correct..



- 4—in-1
- O High Efficiency with Energy class A
- Using Heat pump technology, products over twice as much heat while consuming less energy than an electric heater
- Humanized Sleep function
- Three speed fan with Two way oscillation
- Adjustable thermostat from 16°C to 31°C
- O Programmable 24 hours auto on/off timer
- Auto mode chooses the comfort settings for you
- High Evaporative Dehumidifier
- Easy-to-Read Multi-color VFD/LED Display
- low voltage startup Memory function
- Loss of power protection



















Hotpoint OOLI

















		. 4
		be Mile
.3	. 100	4

A	
	14000BTU
Model no.	KY-32A/C(MAC140)
Cooling Capacity	14000Btu/h
Heating Capacity	
Electrical Data	
Voltage/Frequency/Phase	220~240V/50Hz
Power Input-cooling	1240W
Power Input-heating	/
Rated current-cooling	5.7A
Rated current-heating	/
Performance	
Refrigerant/Charge	R407C
EER	2.4
Dehumidify Capacity	2.4
Air Flow	346CFM
Noise Level-H/L	<49dB
Compressor brand	TOSHIBA
Compressor Model No.	PG180X1C-4DZDE3

	13000BTU
Model no.	KY-32/B(MAC125)
Cooling Capacity	13000Btu/h
Heating Capacity	13200Btu/h
Electrical Data	
Voltage/Frequency/Phase	220~240V/50Hz
Power Input-cooling	1227W
Power Input-heating	1010W
Rated current-cooling	5.7A
Rated current-heating	4.6A
Performance	
Refrigerant/Charge	R407C
EER	2.4
Dehumidify Capacity	2.4
Air Flow	328CFM
Noise Level-H/L	<45dB
Compressor brand	TOSHIBA
Compressor Model No.	PG180XIC-4DZDE3


PRODUCTS FOR A MORE COMFORTABLE WORLD


Due to our policy of constant development, Aoli reserves the right to modify technical data without notice. While errors and omissions are a possibility, every reasonable effort has been made to ensure the informationin this catalogue is correct..



RoyalCool Holpoint OOLI

POTABLE AIR CONDITIONER PURIFIER (WITH HEAP PUMP)











- 5—in-1 Portable air conditioner with purifier
- High Efficiency with Purifier of Energy class A
- Using Heat pump technology, products over twice as much heat while consuming less energy than an electric heater
- Humanized Sleep function
- Three speed fan with Two way oscillation
- Adjustable thermostat from 16°C to 31°C
- Programmable 24 hours auto on/off timer
- Auto mode chooses the comfort settings for you
- High Evaporative Dehumidifier
- Easy-to-Read Multi-color LED Display
- low voltage startup Memory function
- Loss of power protection





IT IS UNLIMITED FOR US TO SEEK FOR BETTER QUALITY HEPA stands for high-Efficiency Particulate Air filter and refers to a materal tated to trap 99.7% of airborne particles 0.3 microns and larger. The ULPA, Ultra-LowPenetration Air, filter traps even more, 99.99% of particles 0.12 microns and larger.















14800BTU

	14000B10
Model no.	KY-36B(MAC155)
Cooling Capacity	14800Btu/h
Heating Capacity	15000Btu/h
Electrical Data	
Voltage/Frequency/Phase	220~240V/50Hz
Power Input-cooling	1420W
Power Input-heating	1146W
Rated current-cooling	6.5A
Rated current-heating	5.2A
Performance	
Refrigerant/Charge	R407C
EER	2.2
Dehumidify Capacity	2.3
Air Flow	318CFM
Noise Level-H/L	<55dB
Compressor brand	TOSHIBA
Compressor Model No.	PG180X1C-4DZDF3

PRODUCTS FOR A MORE COMFORTABLE WORLD

Due to our policy of constant development, Aoli reserves the right to modify technical data without notice. While errors and omissions are a possibility, every reasonable effort has been made to ensure the









 High Evaporative Dehumidifier Easy-to-Read Multi-color VFD Display low voltage startup Memory function

Loss of power protection












	16000BTU
Model no.	KY-36A/C(MAC161)
Cooling Capacity	16000Btu/h
Heating Capacity	/
Electrical Data	
Voltage/Frequency/Phase	220~240V/50Hz
Power Input-cooling	1440W
Power Input-heating	/
Rated current-cooling	6.6A
Rated current-heating	/
Performance	
Refrigerant/Charge	R407C
EER	2.5
Dehumidify Capacity	2.3
Air Flow	396CFM
Noise Level-H/L	<49dB
Compressor brand	TOSHIBA
Compressor Model No.	PG180X1C-4DZDE3

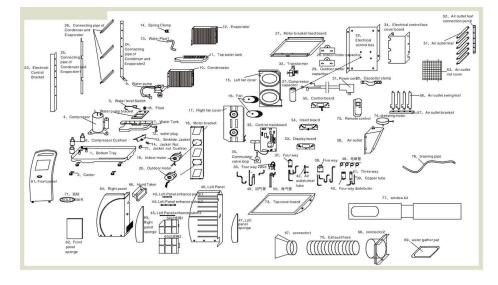

PRODUCTS FOR A MORE COMFORTABLE WORLD

Due to our policy of constant development, Aoli reserves the right to modify technical data without notice. While errors and omissions are a possibility, every reasonable effort has been made to ensure the information in this catalogue is correct..